Transverse vibration of a stretched string

Dr. Soma Mandal,

Assistant professor,

Department of Physics, Government Girls' General Degree College, Kolkata

1 Velocity of transverse vibration of a stretched string

We consider a stretched string of lebgth l rigidly fixed at its end points. In the undisturbed orientation the string lies along X- axis. If this string be excited to transverse vibration, transverse wave will be generated from the point of excitation.

We choose an elementay portion AB of string of length δx . In course of vibration let the configuration of this portion at any time t be A'B', such that the displacement of the point A is y and that of B is $y + \delta y$. If the displacement be small the tension T acting on the string will remain constant.

For the displaced portion A'B' of the string, the tension of A' acts along the tangent A'M while that at the point B' acts along the tangent NB'. Thus the net force acting on the element A'B' along Y direction at time t is

$$T(\sin \theta_2 - \sin \theta_1) = T(\tan \theta_2 - \tan \theta_1) \qquad [As \ \theta_1 \ and \ \theta_2 \ are \ each \ small] \\ = T\left[\frac{\partial}{\partial x}(y + \delta y) - \frac{\partial y}{\partial x}\right] \\ = T\left[\frac{\partial}{\partial x}(y + \frac{\partial y}{\partial x}\delta x) - \frac{\partial y}{\partial x}\right] \\ = T\frac{\partial^2 y}{\partial x^2}\delta x \qquad (1)$$

If m be the mass per unit length of the string and $\frac{\partial^2 y}{\partial x^2}$ represents the acceleration of the portion of the string at time t, we must have

$$T\frac{\partial^2 y}{\partial x^2}\delta x = m\delta x\frac{\partial^2 y}{\partial t^2}$$

 $\partial^2 y = T \ \partial^2 y$

where $m\delta x$ is the total mass of the element δx . or

$$\frac{\partial^2 y}{\partial t^2} = \frac{1}{m} \frac{\partial^2 y}{\partial x^2}$$

$$\frac{\partial^2 y}{\partial t^2} = v^2 \frac{\partial^2 y}{\partial x^2}$$
(2)

or

where $v = \sqrt{\frac{T}{m}}$ = velocity of propagation of transverse waves along the length of the string. The general solution of equation 2 is given by

$$y = f_1(vt - x) + f_2(vt + x)$$
(3)

where $f_1(vt - x)$ represents a wave proceeding along +ve x direction, while $f_2(vt - x)$ denotes another wave travelling along -ve x direction.

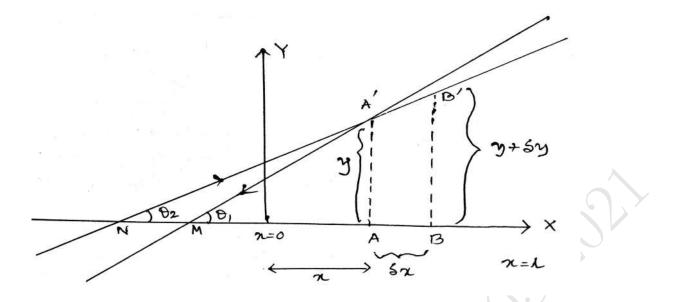


Figure 1: Transverse vibration of a stretched string

Production of stationary waves on string $\mathbf{2}$

We have from equation 2 the general wave equation correspond to transverse vibration of the stretched string as

Let

$$y(x,t) = \phi(x)\theta(t) \tag{4}$$

where $\phi(x)$ is exclusively a function of x and $\theta(t)$ is entirely a function of t.

$$\frac{\partial^2 y}{\partial t^2} = \phi(x) \frac{\partial^2 \theta}{\partial t^2}$$
$$\frac{\partial^2 y}{\partial x^2} = \theta(t) \frac{\partial^2 \phi}{\partial x^2}$$

From equation 2

 $\phi(x)\frac{\partial^2\theta}{\partial t^2} = v^2\theta(t)\frac{\partial^2\phi}{\partial x^2}$

or

$$\frac{1}{\theta}\frac{\partial^2\theta}{\partial t^2} = \frac{v^2}{\phi}\frac{\partial^2\phi}{\partial x^2} \tag{5}$$

The L.H.S of the equation is exclusively a function of t while the R.H.S is entirely a function of x. Hence, each side must be a constant. The constant is real, and for the finite bounded vibration of the string this constant must be -ve. We choose it as ω^2 . Thus from equation 5

$$\frac{\partial^2 \theta}{\partial t^2} + \omega^2 \theta = 0 \tag{6}$$

$$\frac{\partial^2 \phi}{\partial x^2} + \frac{\omega^2}{v^2} \phi = 0 \tag{7}$$

The general solution of 6 is given by

$$\theta(t) = A\cos\omega t + B\sin\omega t$$

and that of 7 is given by

$$\phi(x) = C\cos\frac{\omega x}{v} + D\sin\frac{\omega x}{v} \tag{9}$$

where A, B, C and D are arbitrary constants. Thus, the general solution of equation 2 is written as

$$y = (A\cos\omega t + B\sin\omega t)\left(C\cos\frac{\omega x}{v} + D\sin\frac{\omega x}{v}\right)$$
(10)

Since y = 0 both at x = 0 and x = l (l=length of the string) for all time t, we have from 10

$$0 = (A\cos\omega t + B\sin\omega t)C \Rightarrow C = 0$$

$$\therefore y = (A\cos\omega t + B\sin\omega t)D\sin\frac{\omega l}{v}$$
(11)

$$\Rightarrow \sin \frac{\omega l}{v} = 0, \because D \neq 0$$

Since, in this case $\phi(x)$ becomes trivial

$$\therefore \sin \frac{\omega l}{v} = 0$$

or $\frac{\omega l}{v} = s\pi$ where $s = 1, 2, 3....$
or $\omega = \frac{s\pi v}{l}$
(12)

Hence from equation 11

$$y = (A\cos\frac{s\pi vt}{l} + B\sin\frac{s\pi vt}{l})D\sin\frac{s\pi x}{l}$$
$$y = (A_s\cos\frac{s\pi vt}{l} + B_s\sin\frac{s\pi vt}{l})\sin\frac{s\pi x}{l}$$
(13)

where $A_s = A.D$ and $B_s = B.D$ But

$$\omega = \frac{s\pi}{l} \sqrt{\frac{T}{m}} \qquad (\because v = \sqrt{\frac{T}{m}}) \tag{14}$$

$$\therefore \frac{\omega}{2\pi} = f_s = \frac{s}{2l} \sqrt{\frac{T}{m}}$$
(15)

This f_s represent the characteristic frequencies of the s th mode of vibration of the string. Hence the frequency of the fundamental tone is

$$f_1 = \frac{1}{2l}\sqrt{\frac{T}{m}} \tag{16}$$

Since equation (2) is a linear homogeneous equation and equation (13) represents a solution of equation (2) corresponding to the s th mode of vibration, the sum solution for all possible values of s will again be a solution of (2). Thus the complete solution of equation (2) is given by

$$y = \sum_{s=1}^{\infty} (A_s \cos \frac{s\pi vt}{l} + B_s \sin \frac{s\pi vt}{l}) \sin \frac{s\pi x}{l}$$
(17)